


QZ系列产品连接尺寸图

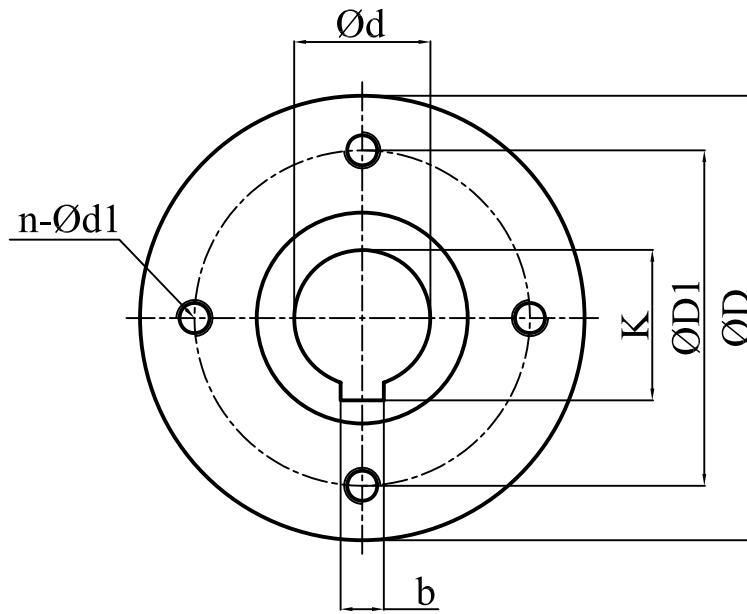

QZ系列气动执行器连接参数表

执行器	输出转矩	连接	连接尺寸 (mm)							重量	
型号	N.m	代号	ΦD	ΦD1	Φd	n-Φd1	B	K	L	气源接口	Kg
QZ8	80	A	92	57	12.7	4-M6×8	3	14.3	35	G1/8"	6.5
		B				4-M6×8(45°)	5	18.3			
		C				4-M6×8(45°)	6	20.8			
		D				4-M6×8(45°)	6	22.8			
QZ20	200	A	106	70	19.05	4-M8×10	5	18.1	40	G1/8"	11
		B				4-M8×10	5	21.3			
		C				4-M8×10(45°)	6	22.8			
		D				4-M8×10(45°)	6	24.8			
QZ60	600	A	128	89	22.2	4-M12×15	5	24.3	55	G1/4"	15
		B				4-M12×15	8	31.4			
		C				4-M8×15(45°)	6	26.8			
		D				4-M8×15(45°)	8	29.3			
QZ100	1000	A	176	110	28	4-M12×15(45°)	8	31.3	55	G1/4"	21
		B				4-M12×15	8	35.5			
		C				4-M12×15(45°)	10	35.3			
		D				4-M12×15(45°)	10	35.3			
QZ160	1600	A	200	108	31.8	4-M12×15	8	35.5	80	G1/4"	28
		B				4-M12×15	8	35.3			
		C				4-M18×25	10	36.6			
		D				4-M18×25	10	36.6			
QZ350	3500	A	200	158.75	33.34	4-M12×15	8	35.5	80	G1/4"	45
		B				4-M12×15	8	35.3			
		C				4-M18×25	10	36.6			
		D				4-M18×25	10	41.3			
QZ450	4500	A	200	158.75	41.15	4-M18×25	10	44.5	80	G1/4"	60
		B				4-M18×25	10	44.5			
		C				4-M16×25	14	54			
		D				4-M16×25	16	56			
QZ550	5500	A	300	215.9	50.65	8-M16×25	16×2	63	80	G1/4"	70
		B				4-M20×25	16×2	58.65			
		C				8-M16×25	16×2	56			
		D				8-M16×25	16×2	63			
QZ650	6500	A	300	215.9	50.65	4-M20×25	16×2	58.65	80	G1/4"	85
		B				8-M16×25	16×2	56			
		C				8-M16×25	16×2	63			
		D				8-M16×25	16×2	63			
QZ900	9000	A	254	215.9	50.65	8-M16×25	16×2	60	80	G1/4"	100
		B				8-M16×25	16×2	63			
QZ1200	12000	A	254	215.9	50.65	8-M16×25	16×2	63	80	G1/4"	115
		B				8-M16×25	16×2	63			
		C				8-M16×25	20×2	84			
						85	8-M16×25	22×2	95	142	